

. J. FIXING SCREW & PIPE TYPE

How to Identify-

Numbers 1 and 2 are inscribed on back of the adjustable link. (Fig. 1)

1. Removing links

Remove the bracelet fixing screw from side # 1 by using a screwdriver.

Turn it counterclockwise to loosen the screw. (Fig. 2)

Remove the screw from side #1, with a screwdriver.

Push the bracelet fixing pipe out of the link. (Fig. 3)

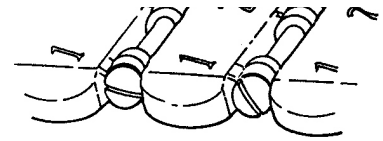


Fig. 1

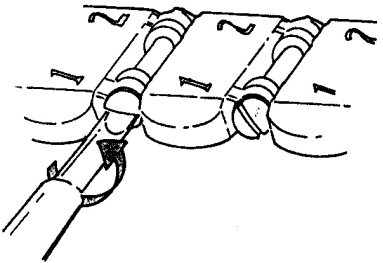


Fig. 2

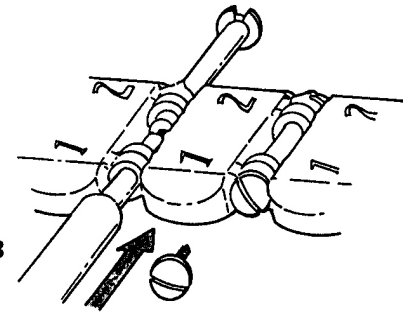


Fig. 3